



慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UJCU 技术参数



UJCU 技术参数		B	C	D
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range	28-12		
单/多芯线	Solid/Stranded [AWG]	28-12		
耐压	Withstanding Voltage	1600V/1Min		





IEC 技术参数

IEC Technical Data		IEC611894		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Rated impulse voltage [kV]	4.0	4.0	4.0

导体截面		0.2-2.5		
导体截面	Conductor cross section	0.2-2.5		
硬质/柔性导线	Solid/flexible	0.2-2.5		

材料		材料		
绝缘材料	Insulation Material	PA66		
阻燃等级	Inflammability	UL94V-0		
导体材料	Conductor Material	铜合金 Copper alloy		
导体表面镀层	Conductive Coating	镀锡 Sn Plated		

一般参数		一般参数		
间距	Pitch / 极数	Roles	[mm]/[P]	5.08/02-24
剥线长度	Shipping Length		[mm]	7-8
螺丝	Screw/扭矩	Torque(Max)	[N.m]	M3.0/5
工作温度	Operating temperature		[°C]	-40~105
焊接温度	Operating temperature		[°C]	-
引针尺寸	Pin Dimensions		[mm]	-
PCB板孔径	PCB Hole Diameter		[mm]	-

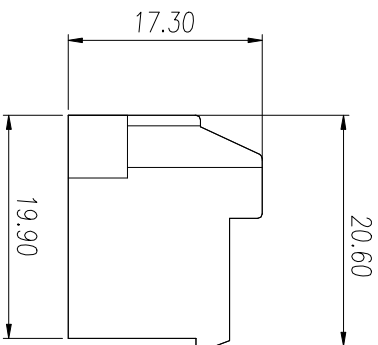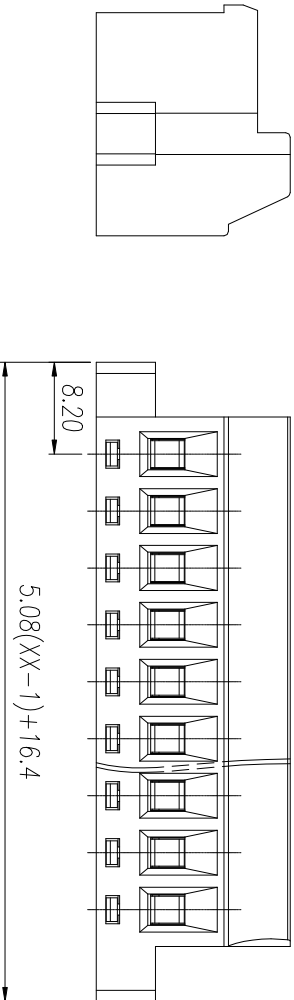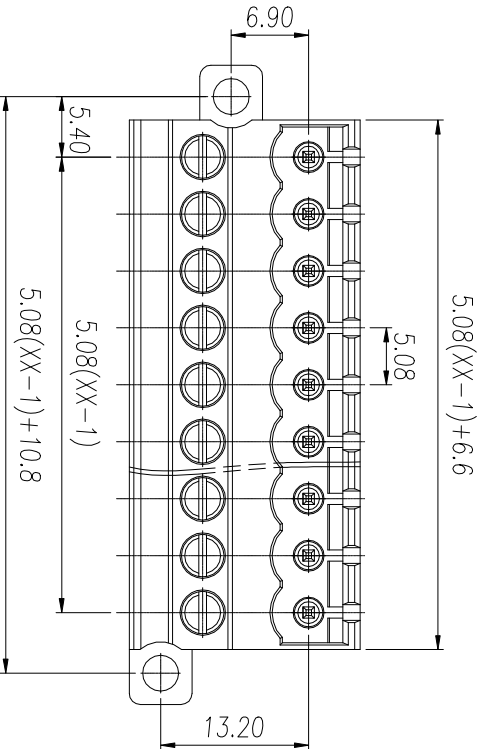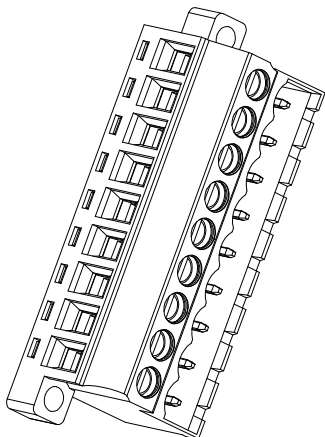

linear dimension(Tolerances Standard GB/T 14486-2008)

tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
variable range	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 100	10 to 100	10 to 100	10 to 100	100 to 100

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 1:5.1

第三视图/THIRD ANGLE PROJECTION 版本 / REV V0



名称 / TITLE WJ2EDGGB-5.08-XP-1YY-00A